



David Round, Inc.  
Ruger Division  
10200 Wellman Road  
Streetsboro, OH 44241  
Phone: 330-656-1600  
Fax: 330-656-1601  
www.rugerindustries.com

HYDRAULIC

90 DEGREES

AFFORDABLE


SWING BOOM

## HP-1/2CJ

- 1000 lb. Capacity
- 90 degree boom swing with load
- Outrigger folds up

### ACCESSORIES

- Floor Lock
- Phenolic or Polyurethane wheels
- Air/Oil
- Power-Pak

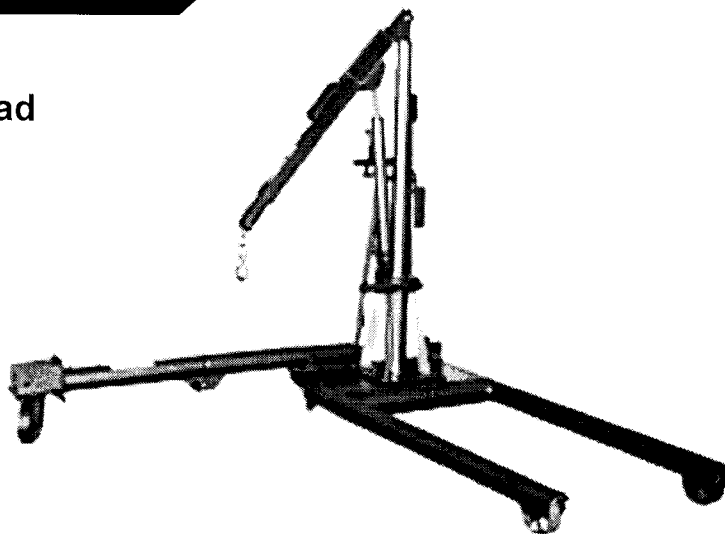

### STANDARD FEATURES

- Meets Ruger's engineering standards of 150% structural overload of maximum rated capacity
- Double action hand pump for quicker and easier lift
- Built-in hydraulic overload relief valve (An original Ruger patent)
- Needle type release valve permits pin-point control over lowering or holding of heaviest or lightest loads
- Adjustable telescopic boom
- Steel wheels and casters with roller bearings
- Swivel hook with safety latch and chain to support heavy loads


Prices, Specifications, and Options are subject to Change Without Notice.

FAX: 330-656-1601

E-mail: info@davidround.com

All Ruger products are shipped F.O.B. Streetsboro, OH 44241

Equipped with a retractable outrigger allows the HP-1/2 CJ crane boom to position loads 90 degrees to either side. Tested and exceeds ANSI/ASME PALD standards. Meets ANSI Z.535



David Round, Inc.  
 Ruger Division  
 10200 Wellman Road  
 Streetsboro, OH 44241  
 Phone: 330-656-1600  
 Fax: 330-656-1601  
 www.rugerindustries.com

HYDRAULIC


90 DEGREES

AFFORDABLE

SWING BOOM

# MODEL: HP-1/2CJ

Model .....	HP-1/2CJ
Max. Capacity .....	1000 lbs
Overall Base Length .....	69 3/4"
Overall Width .....	32"
Overall Height .....	68-1/2"
Width Between Legs .....	25"
Boom Reach Retracted .....	39"
Boom Reach Extended .....	51"
Boom Height (lowest position) .....	34"
Boom Height (highest position) .....	97"
Ext. Boom Height (lowest position) .....	26"
Ext. Boom Height (highest position) .....	105"
Height of Legs .....	6 3/4"
Wheel Diameter-Load Wheels .....	6"
Wheel Diameter-Steering wheels .....	4"

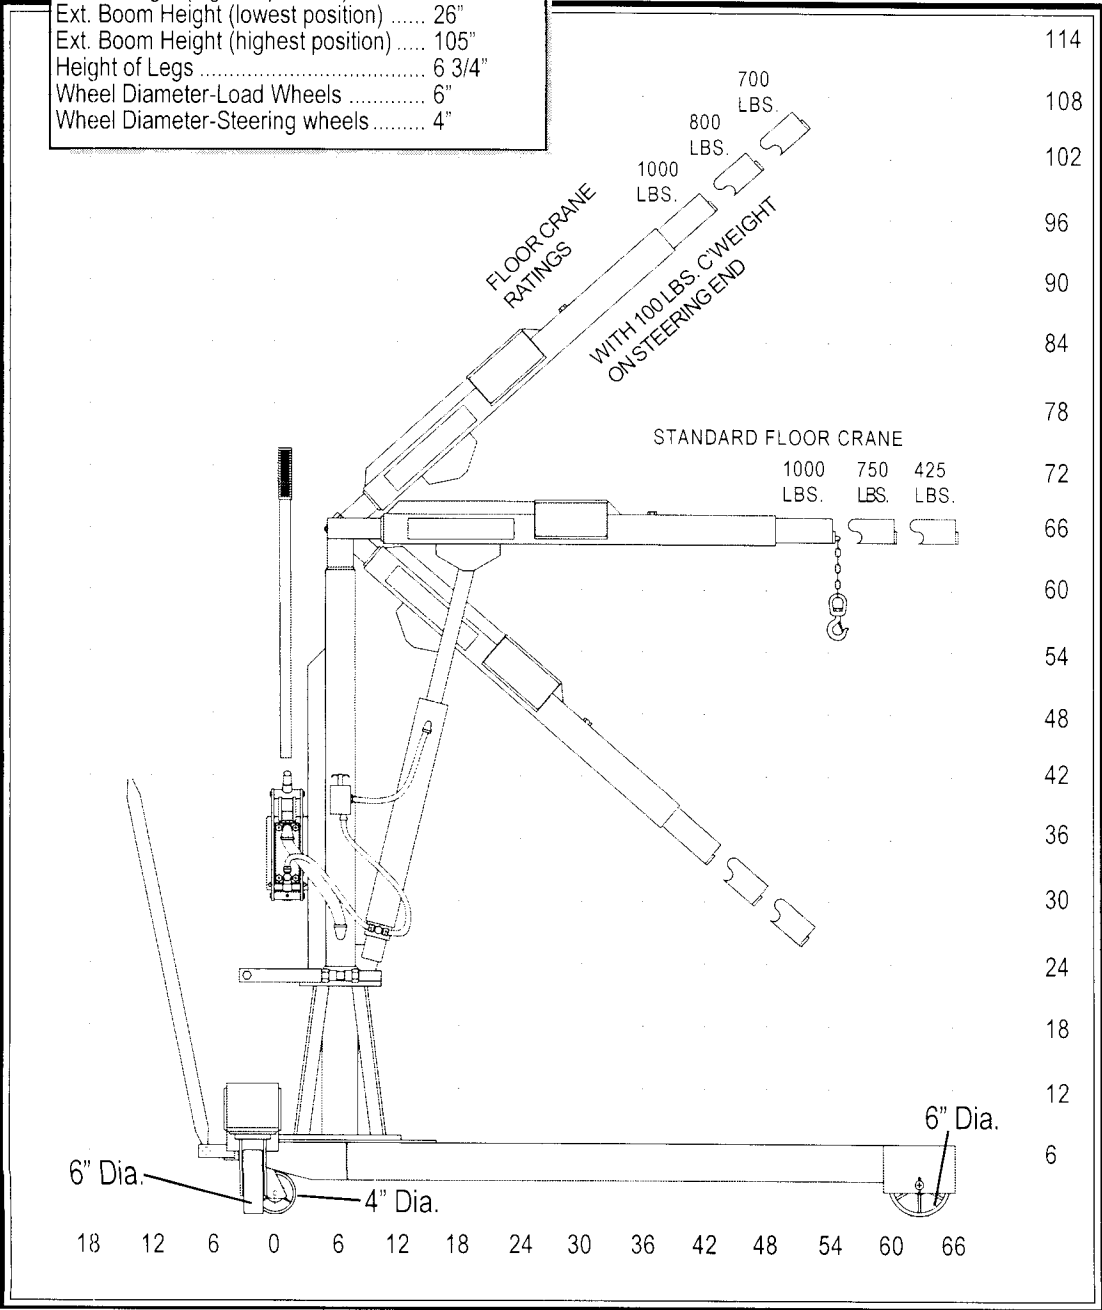

**NOTE:**  
 Ruger can modify  
 any standard  
 dimensions  
 to meet specific  
 customer needs.